

# LevelRay

## Radar Level-Sensor

**The radar level-sensor designed by Teledyne ISCO Water specifically for water and wastewater applications.**

Teledyne ISCO Water's LevelRay non-contact level sensor uses FMCW (Frequency Modulated Continuous Wave) technology to remotely measure liquid level. The sensor is mounted over the flow stream, transmitting and receiving radar waves that are reflected off the liquid's surface. The elapsed time between transmitted and returned signals determines liquid level. The non-contact measurement method reduces the frequency of maintenance and is ideal for applications where the flow may contain chemicals, grease, silt, or suspended solids.

### Also submersible for continuous operation

In addition to working as a non-contact sensor using radar waves, the LevelRay's rugged design and IP68 protection allow it to withstand being submerged. When a LevelRay is installed with the optional integrated pressure sensor, level measurement switches from radar to the pressure sensor upon submersion and continues providing level readings while submerged..

### Quick and easy flow meter interface

LevelRay outputs level measurement using TIENet® or Modbus RS485 protocols. The TIENet protocol readily allows the LevelRay to interface with Teledyne ISCO DuraTracker or Signature flow meters for level and flow measurement. The flow meter calculates the flow using one of the built-in flow conversions or a user-defined level-to-flow relationship. Using Modbus protocol, LevelRay can be connected to a non-ISCO device for level and flow measurement.



LevelRay hanging on a suspension mounting bracket.



# LevelRay



### Applications:

- Flow and level measurement in wastewater collection system
- CSO (Combined Sewer Overflow) and SSO (Sanitary Sewer Overflow) studies
- Industrial discharge flow measurement
- Flow and level measurement in WRRF (Water Resource Recovery Facility)
- Surface water flow and level measurement
- Horizontal design is ideal for in-pipe installation

### Standard Features:

- Rugged IP68 protection
- TIENet protocol or Modbus RS485 protocol
- Zero deadband
- Bluetooth
- Radar technology is far superior to ultrasonic method—not affected by temperature swings, fumes or steam
- Optional integrated pressure sensor adds submersible operation
- Bluetooth interface with Flowlink Cipher Go for configuration, calibration, viewing live data, and diagnostics


## LevelRay Level Sensor Specifications

<b>Technology:</b>	FMCW Radar
<b>Measurement Range:</b>	0 to 26' (0-8 m)
<b>Accuracy from Sensor Face at 72 °F (22 °C):</b>	±0.08" ±2 mm
<b>Beam Angle:</b>	≤8° 4° From center line
<b>Radar Signal:</b>	60 GHz
<b>Bluetooth™</b>	2.4 GHz
<b>Deadband:</b>	Zero deadband
<b>Size (H x W x D):</b>	2.5 x 2.38 x 8.5 in 6.35 x 6 x 21.6 cm
<b>Weight:</b>	2.3 lbs. (1.0 kg) for 33 ft (10 m) w/o connector 4.5 lbs. (2.0 kg) for 75 ft (23 m) w/o connector 5.7 lbs. (2.6 kg) for 99 ft (30 m) w/o connector
<b>Material:</b>	HDPE
<b>Cable Lengths:</b>	33, 75, 99 ft (10, 23 or 30 m)
<b>Enclosure:</b>	IP68
<b>Certifications:</b>	CE/UL/CSA/UKCA/RoHS FCC 47 CFR Part 15 ETSI EN 302 729
<b>Temperature Range:</b>	Operating: -4–160 °F (-20–60 °C)
<b>Storage:</b>	-40–176 °F (-40–80 °C)
<b>Power Required:</b>	9–27 Vdc
<b>Communication Protocol:</b>	TIENet, Modbus RS485

## Optional Surcharge Measurement

<b>Technology:</b>	Pressure Transducer
<b>Material:</b>	Stainless Steel
<b>Certification:</b>	CE EN61326
<b>Temperature Range:</b>	-4–140 °F (-20–60 °C)
<b>Measurement Range:</b>	0–33 ft (0–10 m)
<b>Accuracy</b>	±0.10% of full scale
<b>Stability:</b>	±0.023 ft/yr (0.007 m)

## Mounting Options

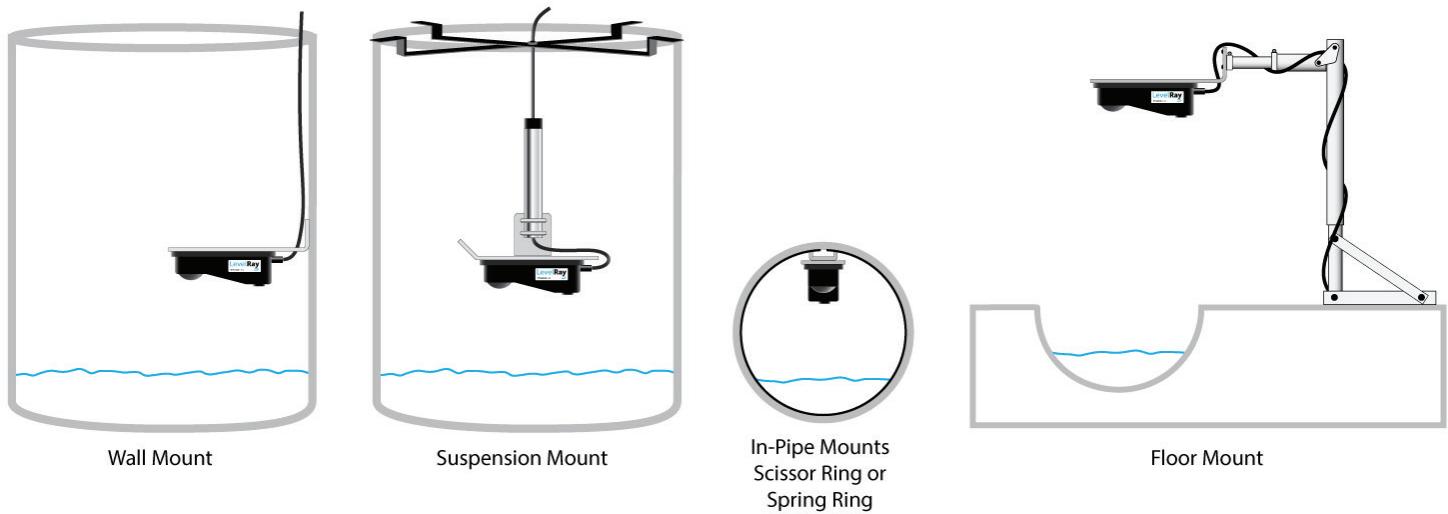

### Teledyne ISCO

P.O. Box 82531, Lincoln, Nebraska, 68501 USA

Toll-free: (800) 228-4373 • Phone: (402) 464-0231 • Fax: (402) 465-3091

[teledyneisco.com](http://teledyneisco.com)



Teledyne ISCO is continually improving its products and reserves the right to change product specifications, replacement parts, schematics, and instructions without notice.

**TELEDYNE**  
ISCO